


Capitol™ product Specification

#029

Flammable Pad Cement

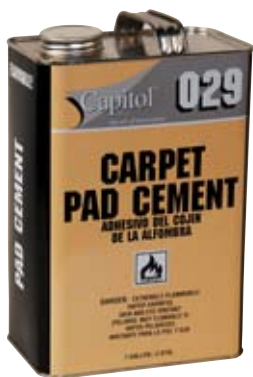

Capitol's 029 Solvent Based, Flammable Carpet Pad Cement is specially formulated to quickly and permanently bond most residential carpet padding. 029 is fast setting and water proof. 029 allows for

stretching of carpet without carpet cushion wrinkling or slipping.

Description: Flammable Carpet Pad Cement

Flammability: Extremely Flammable

Open Time: 10 minutes - Completely dry within 25 minutes.

Clean Up: Safety solvent or mineral spirits.

Shelf Life: One year in closed container.

Packaging: 1 Gallon (6/case)

Estimated Coverage: 700 lineal feet per gallon

Application: Remove cap, punch hole (or holes) in inner seal. Spread a continuous 1/2" bead over the clean, dust free floor in a zigzag motion. Adhesive should be spread around the perimeter, and under all padding seams and throughout the field. Allow adhesive to "tack up" 5-10 minutes and press in padding. Bond is complete in about 30 minutes. Replace cap for storage. **CLEAN UP:** Use a safety solvent or mineral spirits.

Caution:

DANGER: EXTREMELY FLAMMABLE • Keep away from heat, sparks, and open flame • Do not smoke, extinguish all flames and pilot lights, and turn off stoves, heaters, electric motors, and other sources of ignition during use and until all vapors are gone. Close container after each use. Avoid contact with skin and eyes. **KEEP OUT OF REACH OF CHILDREN.**

This product contains a substance known to the State of California to cause reproductive harm.

For The Installation Of:

- Rebond Urethane • Prime Urethane • Frothed Urethane • Sponge Rubber • Foam Rubber • Hair & Jute • Synthetic Hair & Jute

For Use Over:

- Concrete- above, on and below-grade, indoors in the absence of excessive moisture, hydrostatic pressure and alkali • Plywood • APA Grade Particle Board • OSB • Terrazzo • Hardwood Floors • Latex-Portland Cement Underlayment • Gypsum Cement Underlayment • VCT (free of wax) • Felt Backed Vinyl Sheet Goods (prime with an acrylic sealer, such as Capitol's LL400 Liquid Latex) • Do not use over existing cutback adhesive.

